

EB GUIDE Speech Extension tutorial

Configuring speech output with a specified rate of speaking

Copyright © 2018 Elektrobit Automotive GmbH

Legal notice

Confidential and proprietary information.

ALL RIGHTS RESERVED. No part of this publication may be copied in any form, by photocopy, microfilm, retrieval system, or by any other means now known or hereafter invented without the prior written permission of Elektrobit Automotive GmbH.

ProOSEK®, tresos®, and street director® are registered trademarks of Elektrobit Automotive GmbH.

All brand names, trademarks and registered trademarks are property of their rightful owners and are used only for description.

1. Tutorial: Configuring speech output with a specified rate of speaking

NOTE



Default window layout

All instructions and screenshots of this user's guide use the default window layout. If you want to follow the instructions, we recommend to set the EB GUIDE Studio window to default layout by selecting **Layout > Reset to default layout**.

SSML prompts give you the opportunity to configure speech output with a specified rate of speaking. The following instructions guide you through the process of adding and configuring an SSML prompt so that the message is spoken slowly.

Approximate duration: 10 minutes.



Adding an SSML prompt to a talk

Prerequisite:

- The content area displays the talk state.

Step 1

In the **Navigation** component, expand the talk state and double-click the talk.

The content area displays the talk editor.

Step 2

Drag an SSML prompt from the **Toolbox** into the prompt section of the talk editor.

Step 3

Add a link to a datapool item if necessary. The link to a datapool item can also be added subsequently.

Step 4

In the **Navigation** component, click the SSML prompt.

Step 5

Press the **F2** key and rename the SSML prompt to `Slow output`.

You added an SSML prompt and renamed it. The **Properties** component displays the properties of the SSML prompt.



Linking an SSML prompt to a datapool item

Prerequisite:

- You completed the previous instruction.

Step 1

In the **Navigation** component click the SSML prompt.

Step 2

Go to the **Properties** component.

Step 3

Next to the `prompt` property, click **Create link....**

A dialog opens.

Step 4

To add a datapool item, enter `SSML DP` in the text box.

Step 5


Click **Add datapool item**.

Step 6

Select the `SSML DP` datapool item.

Step 7

Click **Accept**.

The dialog closes. Next to the `prompt` property, the  button is displayed. It indicates that the `prompt` property is linked to the `SSML DP` datapool item. The `SSML DP` datapool item is displayed in the **Datapool** component.



Configuring the datapool item of type `SSML prompt`

Prerequisite:

- You completed the previous instruction.

Step 1

In the **Navigation** component, click the `Slow output` SSML prompt.

Step 2

Go to the **Properties** component.

Step 3

Next to the `prompt` property, click **Edit**.

A script editor opens.

Step 4

Click **Enlarge**.

Step 5

Drag the following model elements from the **Toolbox** into the content area:

- ▶ Speak
 - as parent model element
- ▶ Break
- ▶ Prosody

Make sure that the content area looks as follows.

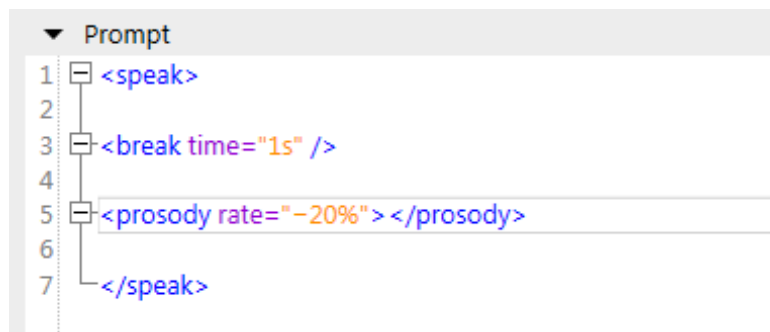


Figure 1. SSML DP datapool item with model elements

Step 6

Enter text in the content area, so that it looks as follows.

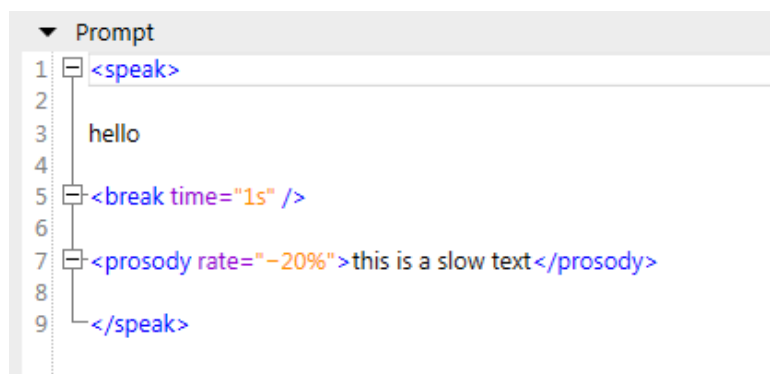


Figure 2. Configured SSML DP datapool item

You configured the SSML DP datapool item, which is linked to the `prompt` property of the SSML prompt.

When playback of the SSML prompt starts, the playback is paused for one second after `hello`. The text `this is a slow text` is spoken 20 per cent more slowly than a regular playback.